

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 November 2001 (15.11.2001)


PCT

(10) International Publication Number
WO 01/85074 A1

- (51) International Patent Classification⁷: **A61F 5/448** [DK/DK]; Erichsensvej 19, DK-220 Gentofte (DK).
HANSEN, Michael [DK/DK]; Dyreholmen 33, Strand Esb., DK-3250 Gilleleje (DK).
- (21) International Application Number: **PCT/DK01/00318**
- (22) International Filing Date: **8 May 2001 (08.05.2001)** (74) Agent: **HOFMAN-BANG ZACCO A/S**; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **PA 2000 00756** **8 May 2000 (08.05.2000)** **DK**
- (71) Applicant (for all designated States except US): **COLO-PLAST A/S** [DK/DK]; Høltedam 1, DK-3050 Humlebæk (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LEISNER, Henrik** (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: **OSTOMY CARRIER DEVICE WITH FLEXIBLE FLANGE**

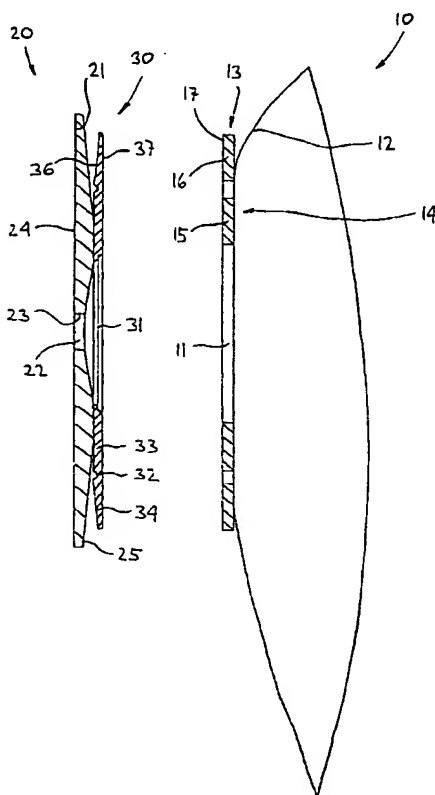

(57) Abstract: The present invention relates to a carrier device comprising a flexible adhesive base plate with an opening for securing the carrier device to a user's skin around a stoma, and a substantially circumferential flange made of a flexible material and being adapted for removable and adhesive connection with a coupling element of an ostomy collecting bag, and wherein the outer portion of the flange is free to move relative to the base plate. According to the invention, the outer portion of the flange is more flexible than the inner portion of the flange. This feature ensures that the outer peripheral portion of the flange can absorb movements between the carrier device and the collecting bag thus protecting against peeling of the bond between the flange members as well as providing a cushioning effect against forces acting on the periphery of the flanges, whereas the inner less flexible portion is adapted to withstand deformations originating from the adhesive pad.

WO 01/85074 A1



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Ostomy carrier device with flexible flange

BACKGROUND OF THE INVENTION AND PRIOR ART

5 The present invention relates to an ostomy carrier device adapted for use in a collecting system for use by patients having a stoma. More specifically the present invention relates to an ostomy carrier device comprising a flexible adhesive base plate with an opening for
10 securing the carrier device to a patient's, or user's, skin around a stoma, as well as a circumferential mounting flange made of a flexible material and being adapted for removable and adhesive connection with a coupling element of an ostomy collecting bag, the carrier
15 device and the collecting bag making up a collecting system.

In collecting systems in general, the base plate of the carrier device must be able to remain on the user over a long period of time, for example up to 8-10 days. During
20 this whole period of time, the carrier device must be capable of withstanding deformation due to the user's movements, washing, exposure to bag replacements, etc. Conventionally, the base plate of such a carrier device is designed as a thin adhesive wafer or pad, to which is at-
25 tached a coupling means for coupling the carrier device to a collecting bag. In the collecting systems which until now have been dominant on the market, the coupling has been provided by first and second relatively rigid coupling rings on the base plate and collecting bag, re-
30 spectively, the coupling rings being detachably connectable to each other. When such a rigid ring system is attached to the base, movements and deformations to the base plate will not influence the locking engagement be-

tween the coupling rings, this resulting in a long-lasting connection between the collecting bag and the base plate.

- 5 However, the above conventional system has a number of drawbacks. For example, the rigid coupling rings may be uncomfortable for the user during use as they prevent the base plate from following the contours of the body when the user moves, and it does not provide the desired shock
10 absorbing effect between the collecting bag and the user, which, of course, reduces comfort. Further, such a coupling ring system is relatively bulky and thus difficult to hide behind many types of garment, this presenting a cosmetic and aesthetic problem to many users and thus a
15 reduced acceptance.

In the past proposals have been suggested for novel and improved coupling systems overcoming the above problems. One such system relies on a coupling comprising a circumferential flange firmly attached to the base plate and
20 made of a flexible material being adapted for removable and adhesive connection with a coupling element of a ostomy collecting bag. Another similar system comprises a circumferential flange attached to the base plate corresponding to the inner edge portion of the flange, the
25 outer portion of the flange being free to move relative to the base plate.

The carrier devices of the above-described systems have
30 proven very comfortable to wear; however, due to a number of problems such systems have until now not been successful.

One problem with these systems arises when the flexible flange is forced to follow the movements of the base plate, this resulting in a tendency for the collecting bag to detach from the flange. It is believed that this is due to stretching of the flange material resulting in reduced adhering properties of the flange surface, especially when the material of one of the flanges is non-adhesive, the adhesive being on either the coupling element of the collecting bag or the base plate flange. Eventually a leak will be formed which, indeed, is unacceptable to the user.

One attempt to overcome these problems is described in EP 0 276 042 disclosing a base plate with a relatively rigid flange attached, the adhesive connection taught between bag and carrier device being provided by a number of layers of adhesive applied to the flange of the base plate and activated one after the other, which limits the number of times the bag can be changed to the number of layers of adhesive. Use of such rigid flange member may serve to protect the bond between the flange member and the collecting bag; however, it reintroduces the rigidity of the above described coupling ring system. Furthermore, a new problem is introduced as the rigid flange member allows the coupling element on the ostomy bag to peel off as the collecting bag moves relative to the carrier device during normal use of the system.

A different approach to negotiate the above problems is described in WO 96/38106 in which a soft flexible ring of a foam material is mounted on the base plate, this allowing the base plate flange and the flexible connecting flange of a collecting bag mounted thereon to move rela-

tive to the base plate. This approach reduces the tendency of the adhesive bond between the carrier device and the collecting bag to break up, however, after removal of the used collecting bag, the deformations to the foam
5 ring thereby introduced will leave an uneven or wrinkled surface for the next collecting bag to be mounted, thereby jeopardising the sealing action.

SUMMARY OF THE INVENTION

10

In the light of this, an object of the present invention is to provide an improved carrier device, which helps remedy one or more of the above described problems. More specifically, an object is to provide a carrier device,
15 which ensures a safe and reliable bond between the carrier device and the attached collecting bag and yet provides a high degree of wearing comfort.

The present invention is based on the recognition that
20 the different portions of the mounting flange serve different specialised functions. More specifically, it has been found by the present inventors that the innermost portion of the flange should be adapted to withstand movements as well as deformation of the flexible adhesive
25 base plate in order to prevent peeling of the bond to start from the inner edge, whereas the outermost portion of the flange should be adapted to withstand the external forces applied to the bond due to, primarily, movements of the collection bag which arise during use thereof. In-
30 deed, in combination the inner and outer portions of the flange should ensure against axially directed pulling forces applied on the bag.

A first choice to protect a flexible inner portion of a coupling flange against excessive deformation originating from the adhesive base plate would be to make the latter thicker and stiffer. Such a solution can be easily implemented and is found to work well, the relatively stiff base plate protecting the mounting flange from "curling". However, the present inventors have found that this solution will only work for a relatively short period of time after which peeling will start from the inner edge of the bond. The reason for this has been found to be due to long-term (i.e. over days) plastic deformation, or "creeping", of the adhesive base plate material normally used for this purpose.

Thus, if it would be possible to base a solution on these recognitions, an ostomy collecting system would be provided that combines the best properties of the known systems: high resistance to leakage yet providing excellent comfort for the user.

According to the invention, the above is achieved by a carrier device comprising a flexible adhesive base plate with an opening for securing the carrier device to a user's skin around a stoma, and a substantially circumferential flange made of a flexible material and being adapted for removable and adhesive connection with a coupling element of a ostomy collecting bag, wherein the outer portion of the flange is free to move relative to the base plate and the outer portion of the flange is more flexible than the inner portion of the flange. This latter feature ensures that the outer peripheral portion of the flange can absorb movements between the carrier device and the collecting bag thus protecting against

peeling of the bond between the flange members as well as providing a cushioning effect against forces acting on the periphery of the flanges, whereas the inner less flexible portion is adapted to withstand deformations
5 originating from the adhesive pad. Preferably the flange is a relatively thin, substantially planar sheet or foil-like structure.

Although it is considered that the expression "more
10 flexible" is clear to the skilled person within this technical field, i.e. properties with regard to flexibility which meet the stated objects of the invention, it could be defined that the average flexibility of the outer portion is at least 10 %, preferably at least 20 %
15 higher than the average flexibility of the inner portion. Such an "average flexibility" would be relevant as, for example, the outer portion may comprise segments, e.g. ring-formed, which would locally be less flexible than the outer portion in general. It may very well be that
20 for a given carrier device a difference of only 10 % will solve the stated problem, whereas for another carrier device a difference of more than 100 % will be necessary. Indeed, for a flange made of a single material, the above considerations would apply to the thickness of the dif-
25 ferent portions of the flange, i.e. the average thickness of the outer portion is correspondingly at least 5 %, preferably at least 10 % less than the average thickness of the inner portion.

30 In the context of the present invention the term "circumferential" implies only that a member provides a structure surrounding an opening; such a member may have circular inner and outer edges, however, it could have any

combination of, for example, round, oval or angular shapes.

When it is stated that an outer portion of the flange is
5 free to move with respect to the base plate, this means
that only an inner edge or a part of the inner portion of
the flange is attached to the base plate, while the re-
mainder of the flange is free to move relative thereto.

10 When the carrier device defines a general plane of refer-
ence, it is clear to the skilled person that no strictly
mathematical plane is defined but a plane represented by
the carrier device itself, such a device having a gener-
ally planar configuration. When the body side member is
15 attached to the user, the plane of reference will be sub-
stantially parallel with the user's skin.

According to a preferred embodiment of the invention, a
hinge is formed between the outer and inner portions of
20 the flange, such a hinge providing an "un-coupling" of
the inner and outer portions allowing the two portions to
serve their respective purposes even better. More spe-
cifically, a hinge will be able to distribute the forces
acting on the inner portion of the flange, and thus the
25 stoma, when the outer portion is subject to external
forces during use, this providing increased carrying com-
fort. Further, the hinge will be able to reduce the
amount of deformation which is transferred from the inner
to the outer portion of the flange, this reducing the
30 risk that peeling starting from the inner edge of the
flange will spread to the outer portion and ultimately to
the outer edge of the flange, which then would amount to
a leak being formed. The hinge may be formed with a

thickness, which is less than the thickness of the inner and outer portions of the flange to which it connects, or it may be formed by a material having a desired high flexibility.

5

According to a further preferred embodiment, the flange has a coupling surface facing away from the base plate and defining an attachment area, an outer circumferential portion of the flange corresponding to at least 50 % of the area being free to move with respect to the other members of the carrier device. This construction allows an adhesive coupling member of a collecting bag to be fastened primarily or entirely on this free portion, which ensures adequate protection against peeling action as well as against forces applied to the collecting bag that are transmitted directly to the base plate.

10
15

BRIEF DESCRIPTION OF THE DRAWINGS

20

The invention will now be described in further detail below with reference to the schematic drawing, in which

fig. 1 is a sectional view of a carrier device according to the invention and a collecting bag to be mounted on the carrier device;

25

fig. 2a-2f show different embodiments of a flange to be used as part of a carrier device according to the invention;

30

fig. 3 shows an embodiment in which the flange consists of a number of leafs; and

fig. 4 shows an open end of an intestine of a patient, which has been attached to the abdominal wall to form a stoma.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The ostomy collecting system shown in fig. 1 comprises a collecting bag 10 for collection of faeces and a carrier device 20 with a circumferential flange 30 for fastening the bag 10 around an intestinal orifice in the form of a so-called stoma in a user's abdominal wall (not shown), and for this purpose it has an inlet opening 11 in a bag wall 12. The bag 10 may either be closed at the bottom as shown or configured with a drainage device for discharging its contents. The inlet opening 11 is surrounded by connecting means for connecting the bag 10 with the flange 30 of the carrier device 20.

20 In the shown embodiment, the connecting means on the bag 10 is in the form of a second flange or bag flange 13 which is fastened to the bag wall 12 by means of a substantially circumferential attachment means defining an attachment zone 14 in such a manner that a rim portion of the bag flange 13 protrudes outwardly beyond the attachment zone. The bag flange 13 may be fastened to the bag wall 12 through any suitable means, for example directly by heat or UV welding or by means of an adhesive. In the shown embodiment the bag flange comprises two concentric rings 15, 16 connected to each other only at a number of narrow bridges (not to be seen in the figure). The two rings are adapted for mounting on an inner respectively an outer portion of the flange 30 and allow the bag

flange to flex easily together with the hinge formed between the inner and outer portions of the flange 30. On the side facing away from the bag, the flange 13 is coated across substantially its entire surface with a thin layer 17 of adhesive, which may, for example, be a hydrogel adhesive, an acrylate adhesive or an adhesive of the hot-melt type. The layer 17 of adhesive is applied thinly, partly to keep down the thickness, partly to maintain the flexibility and resilience of the bag flange 13. This application may be effected, for example, by coating, spraying or application in a suitable pattern. In the delivery state of the bag, the layer 17 of adhesive is typically protected by a release liner (not shown) covering the layer.

The carrier device comprises a circumferential base plate 21 with an opening 22 and an inner free edge 23, and is designed to be adhered to the user's skin by means of a skin-friendly adhesive applied on the lower surface 24 of the base plate intended for attachment to the skin of the user. Preferably the peripheral portion of base plate is formed with a reduced thickness in order to better comply with movements and folding of the skin surface of the patient. The base plate 21 carries a flange or base plate flange 30 on its opposite upper surface 25, in which is formed an opening 31 providing communication between the opening 11 in the bag and the opening 22 in the base plate when the bag is mounted on the carrier device. The flange has a first surface 36 facing towards the base plate, a second opposite surface 37 facing away from the base plate, the second surface of the flange being adapted for removable and adhesive connection with the ostomy collecting bag. In the shown embodiment a hinge 32

is formed between an inner portion 33 and an outer portion 34 of the flange. In the shown embodiment, the different portions of the flange 30 is manufactured from the same material, and the hinge is formed with a thickness, which is less than the thickness of the inner and outer portions of the flange to which it connects. In order to provide a higher flexibility of the outer portion as compared with the inner portion, the outer portion is formed with a reduced thickness as compared with the inner portion. The flange is attached to the base plate corresponding to the reduced-thickness innermost edge portion of the flange, the reduced thickness providing improved heat transfer during the heat bonding process. Indeed, the flange may be attached by any suitable means just as the bond formed between the base plate and the flange may correspond to a smaller or larger area of the inner portion of the flange.

As it appears, the flange 30 is mounted at a distance from the opening 22, allowing the base plate portion surrounding the opening to be cut to provide an opening of a desired size in order to closely fit around the stoma of the user. In the delivery state of the carrier device, the adhesive lower surface 24 of the base plate is typically protected by a release liner (not shown) covering the layer. In the shown embodiment, the flange 30 is non-adhesive; however, the carrier device may also be provided with an adhesive base plate flange 30 adapted to match a non-adhesive bag flange 13, in which case a release liner would be provided on the base plate flange. Recently, adhesives have come on the market that are applied to both surfaces, but are before attachment non-

sticking, thereby alleviating the necessity for a release liner.

With reference to figs. 2a-2e different embodiments for a
5 flange member to be used in combination with a carrier device according to the invention will now be described.

In general, figs. 2a-2e illustrate partial cross sections corresponding to the fig. 1 embodiment, but showing only
10 one half of the carrier device. Further, the base plate is shown only in fig. 2a. The base plate 200 and the flange 100 as well as the different structures thereof are only shown to illustrate their relative placement; neither their relative size nor their form represents
15 specifically preferred embodiments, but are merely illustrative. The bonds between the base plate and the flange are shown only schematically in order to illustrate the position thereof, however, they may be formed in any suitable way such as by adhesive or welding. It is evi-
20 dent that for all embodiments the different bonds represent full, circumferential attachment sections as otherwise leakage between the different structures may occur.

Fig. 2a illustrates an embodiment comprising a flange 100
25 and a base plate 200. The flange 100 comprises an inner circumferential portion 100 with an inner edge 103 and an outer circumferential portion 102 with an outer free edge 104. In accordance with the object of the invention, the outer portion is formed with a reduced thickness to pro-
30 vide a higher degree of flexibility as compared with the inner portion. The transition area 106 between the two portions will establish a "virtual" hinge function between the two portions. The innermost part 105 of the in-

ner portion in the vicinity of the inner edge is formed with a reduced thickness, this allowing a good transfer of heat in a heat welding process thus assuring a narrow bond 205 with reduced risk of heat damage to the flange and/or base plate. The base plate 200 comprises an inner edge 201, an outer edge 202, a lower adhesive surface 204 and an upper surface 206 on which the flange is attached at 205 corresponding to the inner edge portion of the flange, the flange being attached at a distance from the inner edge of the base plate. Although the flange is shown attached to the base plate only at the inner edge portion of the flange, the inner portion of the flange may be attached to the base plate to a greater extent just as it may be attached in patterns different from circumferential rings. The outer portion of the base plate is formed with a progressively reduced thickness towards the outer edge.

In the fig. 2b embodiment a circumferential hinge 116 is formed between the inner and outer portions 111, 112 of the flange, the hinge having a thickness, which is less than the thickness of the portions of the flange to which it connects, preferably less than 75 % of the thickness of the inner portion of the flange. For a preferred embodiment it has been found that the location of the hinge should be determined by the expression $1,1 \times R1 < R2 < (2 \times R3 + R1)/3$, wherein the inner edge of the flange has a radius $R1$, the outer edge of the flange has a radius $R3$, the radial location of the hinge being determined by a radius $R2$. The circumferential hinge need not be a continuous structure but could be formed of circumferentially arranged hinge portions, preferably arcuate portions, arranged between stiffer bridge members connecting

the inner and outer portions of the flange. Also, the hinge (as well as the other structures of the carrier device) need not to be circular but could, for example, be oval in order to be placed with a given preferred orientation when the carrier device is mounted around a stoma. As illustrated, the outer portion 112 is formed with a progressively reduced thickness towards the outer edge, the outer edge portion itself having an increased thickness in order to improve handling during mounting and bag exchange procedures.

In the fig. 2c embodiment the inner portion 121 of the flange is formed as two ring-segments 125, 126 connected by a circumferential bridge portion 127 which will allow the two rings to bend relative to each other. In contrast to the above-described embodiments, the flange is attached to the base plate corresponding to a major part of the inner portion, essentially corresponding to the lower surface of the two ring-segments. Although the increased rigidity of the inner portion will provide improved protection against leaking starting from the inner edge, the shown bridge portion will allow a "break up" of a spreading leak, just as the added flexibility provided by the bridge also improves carrying comfort. As above, the outer edge portion 124 is formed with an increased thickness. The fig. 2c embodiment also illustrates that the general expression that the outer portion of the flange is more flexible (or of reduced thickness) is not to be interpreted literally as meaning that this is the case for every individual component of the respective inner and outer portions of the flange. In fact, the peripheral edge portion 124 will have a higher rigidity (i.e. having a higher modulus of elasticity) as compared with the

bridge, however, this does not change the fact that for the skilled person it is clear that the outer portion 122 has an increased flexibility as compared with the inner portion 121, this as defined in the accompanying claims.

5

Fig. 2d shows an embodiment in which the flange 130 is of uniform thickness, the different flexibilities of the inner portion 131 and outer portion 132 of the flange being based solely on the choice of different materials for the two portions. Evidently, the inner portion 131 is formed from a material more rigid than the material used for the outer portion 132.

Fig. 2e shows an embodiment in which the flange 140 has a configuration similar to that of fig. 2a, however, instead of a reduced-thickness hinge as in fig. 2b, a hinge is formed by using a more flexible material for the circumferential transition area 143 between the inner 141 and outer 142 portions of the flange 140. As explained with respect to fig. 2a, the hinge may be a continuous or a non-continuous structure.

Although fully within the scope of the present invention, fig. 2f shows an embodiment in which it is not possible to structurally define an inner and an outer portion, respectively, for the flange 150. However, in accordance with the invention, the inner less flexible portion may be defined as having a width (i.e. in the radial direction of the flange defined between the inner and outer edge) within 15-85 %, preferably 25-75 %, and more preferably 35-65 % of the overall width of the flange. Preferably a portion of the inner portion of the flange is free to move relative to the base plate (as illustrated

in figs. 2a-2f), such that the width of the moveable portion of the inner portion of the flange is within 15-85 %, preferably 25-75 %, and more preferably 35-65 % of the general width of the flange.

5

In the above, the description has been based on the "traditional" annular form of a carrier device, however, a carrier device according to the invention, as well as its different components, may have any other desired configuration, e.g. oval or angular, just as the attachment between the flange and the base plate may be of any desirable form, e.g. wave-formed or in any discrete or non-uniform pattern. In order to properly distinguish preferred embodiments of the invention for such formed carrier devices, the moveable portion of the inner portion of the flange may be defined based on the areas for the different portions of the flange. Thus, in a preferred embodiment the area of the moveable portion of the inner portion of the flange is within 10-90 %, preferably 25-75 %, and more preferably 35-65 % of the total area of the flange.

As indicated above, the flange and base plate have been described as circumferential structures, however, in order to secure a proper sealing action around the stoma, it suffices if only one single "complete" circumferential structure is formed around the stoma. Thus, in the context of the present application, the term "circumferential" also comprises structures arranged around an opening but having radial partitions. Fig. 3 illustrates such an embodiment in which the flange consists of a number of "leaves" arranged radially outwards from the central opening and between cut-out portions. Indeed, such an ar-

5 arrangement necessitates that the adhesive connection between the carrier device and the collecting bag incorporates the circumferential support member. Further, to avoid adhesive sticking to the base plate, the adhesive portions of the bag flange should be arranged corresponding to the inner support member and the individual leafs.

10 Fig. 4 illustrates how an open end of the intestine 300 of a patient has been attached to the abdominal wall 302 to form a stoma 301. Typically the intestine is arranged to protrude somewhat from the skin surface. When the abdominal wall is cut to provide a stoma during surgical procedures, very often an opening will develop as the deeper layers 303 of the abdominal wall are not closed
15 around the stoma, this allowing the viscera 304 to bulge somewhat through this deep opening thereby creating a small or large bulge 305, a so-called hernia, around the stoma. When the patient moves, the viscera in the hernial opening may move in and out with the result that the bulge falls and rises. When a ostomy carrier device is mounted around the stoma, especially the "falling" will result in deformation of the inner portions of the carrier device leading to a wave-like curling and subsequent lift-off of the adhesive bond between the flanges of carrier device and the bag flange, however, in accordance
20 with the invention, the more rigid inner portion of the carrier flange will reduce the tendency that such deformations will result in the onset of peeling and subsequent leakage.

30

While in the foregoing different embodiments of the invention have been disclosed in detail for purpose of illustration, it will be understood by those skilled in the

art that many of these details may be varied without departing from the scope of the present invention as defined in the accompanying claims.

Patent claim:

1. An ostomy carrier device comprising:

- 5 - a flexible adhesive base plate (21) for securing the carrier device to a user's skin around a stoma, the base plate having an opening (22) for receiving the stoma,
- 10 - a circumferential flange (30) made of a flexible material connected to the base plate, the circumferential flange having a first surface (36) facing towards the base plate, a second opposite surface (37) facing away from the base plate, an inner portion (33) with an inner
- 15 edge and an outer portion (34) with an outer edge, the second surface of the flange being adapted for removable and adhesive connection with an ostomy collecting bag,
- wherein the carrier device defines a general
- 20 plane of reference, a thickness thereof being defined in a direction perpendicular thereto,
- wherein the outer portion of the flange is free to move relative to the base plate,
- 25 characterized in that
- the outer portion of the flange is more flexible than the inner portion of the flange.

30

2. An ostomy carrier device as defined in claim 1, characterized in that at least a portion of the inner

portion of the flange is free to move relative to the base plate.

3. An ostomy carrier device as defined in claim 1
5 or 2, characterized in that the flange has a general width in the radial direction defined between the inner and outer edge, the width of the inner portion of the flange being within 15-85 %, preferably 25-75 %, and more preferably 35-65 % of the general width of the flange.

10

4. An ostomy carrier device as defined in claim 2, characterized in that the width of the moveable portion of the inner portion of the flange is within 15-85 %, preferably 25-75 %, and more preferably 35-65 % of the
15 general width of the flange.

5. An ostomy carrier device as defined in claim 2, characterized in that the area of the moveable portion of the inner portion of the flange is within 10-90 %, preferably 25-75 %, and more preferably 35-65 % of the total
20 area of the flange.

6. An ostomy carrier device as defined in any of the previous claims, characterized in that the flange is
25 connected to the base plate in the vicinity of the inner edge of the flange.

7. An ostomy carrier device as defined in any of the previous claims, characterized in that the inner and
30 outer portions of the flange are made substantially of the same type of material.

8. An ostomy carrier device as defined in claim 5, characterized in that the inner portion of the flange has a first average thickness and the outer portion of the flange has a second average thickness less than the first
5 thickness.

9. An ostomy carrier device as defined in any of claims 1-6, characterized in that the inner portion of the flange is formed from a material having a higher
10 modulus of elasticity than the material from which the outer portion of the flange is formed.

10. An ostomy carrier device as defined in any of the previous claims, characterized in that a substantially circumferential hinge (32) is formed between the
15 outer and inner portions of the flange.

11. An ostomy carrier device as defined in claim 10, characterized in that the hinge has a thickness which is
20 less than the thickness of the inner and outer portions of the flange to which it connects, preferably less than 75 % of the thickness of the inner portion of the flange.

12. An ostomy carrier device as defined in claim 10 or 11, characterized in that the hinge is formed from a material more flexible than the material(s) of the flange
25 portions to which it connects.

13. An ostomy carrier device as defined in any of claims 10-12, characterized in that the inner edge of the
30 flange has a radius R1, the outer edge of the flange has a radius R3, the radial location of the hinge being de-

terminated by a radius R_2 , wherein $1,1 \times R_1 < R_2 < (2 \times R_3 + R_1)/3$.

14. An ostomy carrier device as defined in any of
5 the previous claims, characterized in that the first surface is substantially planar.

15. An ostomy appliance comprising an ostomy carrier device as defined in any of the preceding claims, in combination with a collecting bag (10).

16. An ostomy appliance as defined in claim 15,
characterized in that the collecting bag comprises a bag
flange (13) with an adhesive portion such that an adhesive
15 sive sealing connection can be formed between the ostomy
collecting bag and the flange of the carrier device, the
adhesive of the collecting bag being such arranged that
it can be attached entirely on that portion of the flange
which is free to move relative to the base plate.

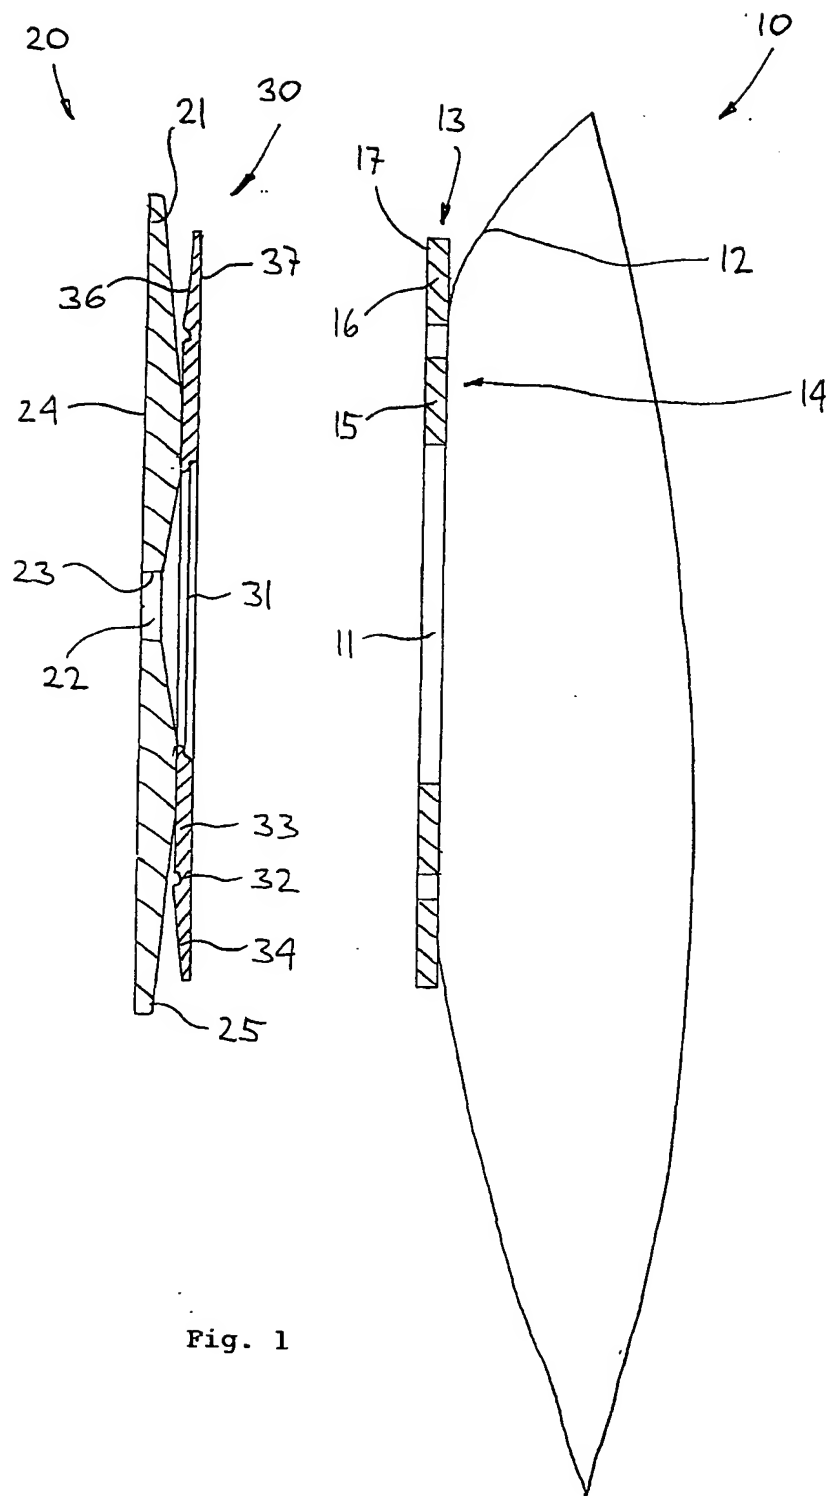


Fig. 1

Fig. 2a

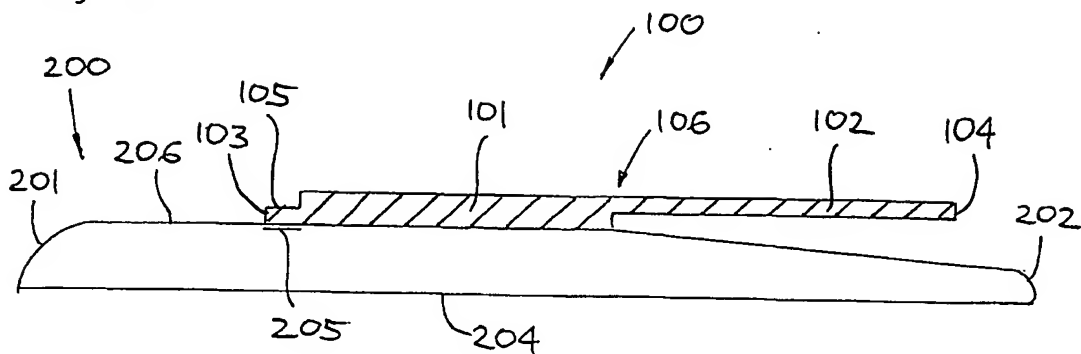


Fig. 2b




Fig. 2c

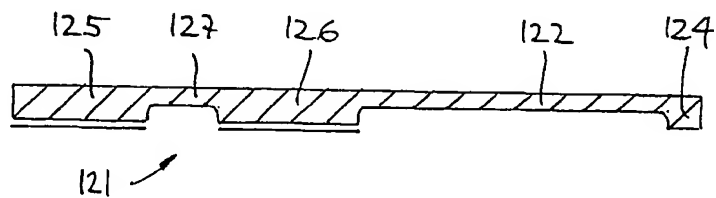


Fig. 2d




Fig. 2e





Fig. 2f

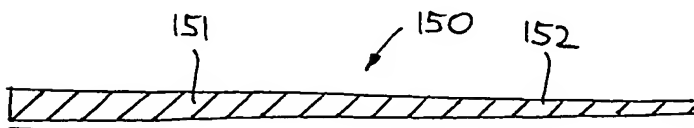

3/4

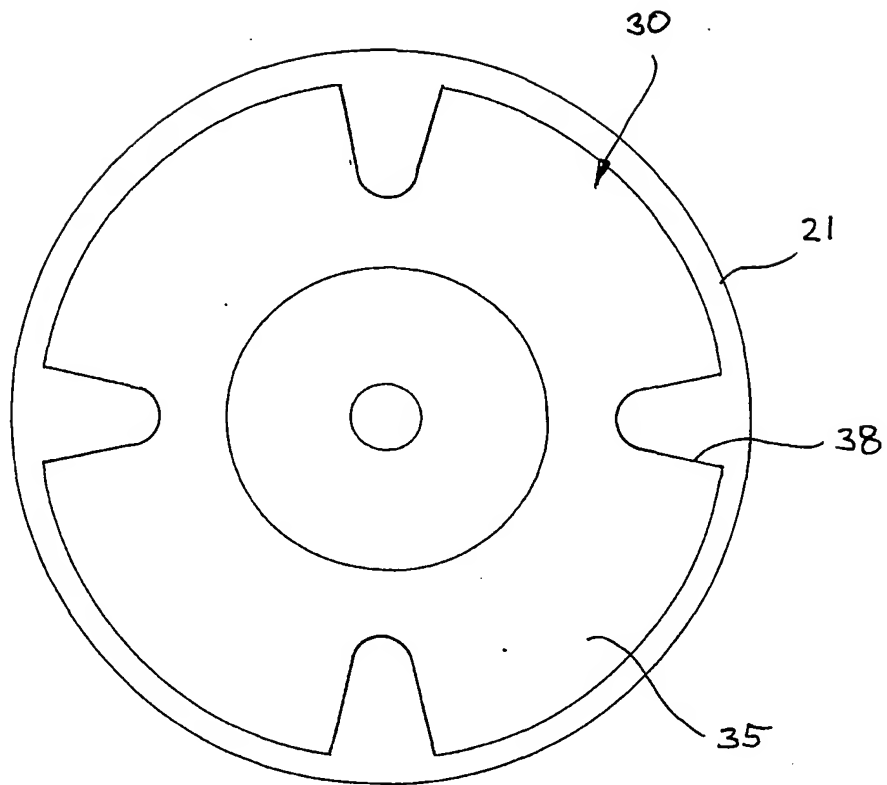


Fig. 3

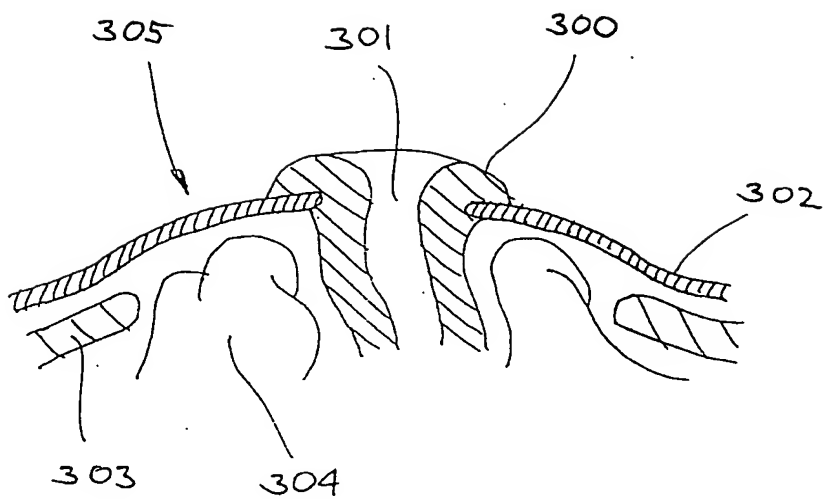


Fig. 4

INTERNATIONAL SEARCH REPORT

Interr Application No
PCT/DK 01/00318

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F5/448

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 38106 A (COLOPLAST AS) 5 December 1996 (1996-12-05) cited in the application the whole document ---	1,3-8, 14-16
A	EP 0 476 847 A (SMITHS INDUSTRIES PLC) 25 March 1992 (1992-03-25) page 1; figures ---	1
A	EP 0 686 381 A (DANSAC AS) 13 December 1995 (1995-12-13) abstract; figures ---	1
A	WO 98 17212 A (GOTHJAELPSEN LAILA BUSK ;CLOK DANUTA (DK); COLOPLAST AS (DK); SLET) 30 April 1998 (1998-04-30) figures 1,8,14 --- -/-	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *A* document member of the same patent family

Date of the actual completion of the international search

30 August 2001

Date of mailing of the International search report

06/09/2001

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Sánchez y Sánchez, J

INTERNATIONAL SEARCH REPORT

Inter. Application No
PCT/DK 01/00318

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 181 652 A (EDWARDS JOHN VICTOR; LIPMAN ROGER DAVID ARNOLD) 29 April 1987 (1987-04-29) abstract	1
A	EP 0 629 388 A (HOLLISTER INC) 21 December 1994 (1994-12-21) figure 4	10-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inten Application No
PCT/DK 01/00318

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9638106 A	05-12-1996	DK 60795 A	30-11-1996
		AT 187057 T	15-12-1999
		AU 716253 B	24-02-2000
		AU 5892996 A	18-12-1996
		CA 2204614 A	05-12-1996
		CN 1165474 A	19-11-1997
		DE 69605411 D	05-01-2000
		DE 69605411 T	08-06-2000
		DK 828465 T	29-05-2000
		EP 0828465 A	18-03-1998
		ES 2140855 T	01-03-2000
		JP 11505754 T	25-05-1999
		NO 972082 A	13-06-1997
		US 5800415 A	01-09-1998
EP 0476847 A	25-03-1992	DE 69105427 D	12-01-1995
		DK 476847 T	30-01-1995
		GB 2247840 A, B	18-03-1992
		JP 4226655 A	17-08-1992
		US 5160330 A	03-11-1992
EP 0686381 A	13-12-1995	US 5496296 A	05-03-1996
		CA 2150401 A	07-12-1995
WO 9817212 A	30-04-1998	DK 116696 A	23-04-1998
		AU 721675 B	13-07-2000
		AU 4616397 A	15-05-1998
		CN 1233945 A	03-11-1999
		EP 0998247 A	10-05-2000
		JP 2001502570 T	27-02-2001
		NO 991905 A	22-06-1999
		AU 729075 B	25-01-2001
		AU 4616297 A	15-05-1998
		CN 1233965 A	03-11-1999
		WO 9817329 A	30-04-1998
		EP 0938349 A	01-09-1999
		JP 2001502569 T	27-02-2001
		NO 991904 A	22-06-1999
		AU 726169 B	02-11-2000
		AU 7425898 A	30-12-1998
		BR 9809692 A	11-07-2000
		CN 1258208 T	28-06-2000
		DK 68998 A	27-11-1998
		WO 9853771 A	03-12-1998
		EP 0984750 A	15-03-2000
		NO 995740 A	18-01-2000
		PL 336960 A	31-07-2000
		AU 7426598 A	30-12-1998
		WO 9854269 A	03-12-1998
		EP 0985006 A	15-03-2000
GB 2181652 A	29-04-1987	NONE	
EP 0629388 A	21-12-1994	US 5312382 A	17-05-1994
		AU 671364 B	22-08-1996
		AU 6349894 A	08-12-1994
		CA 2124714 A	04-12-1994
		DE 69406590 D	11-12-1997

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inten I Application No

PCT/DK 01/00318

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0629388 A		DE 69406590 T	05-03-1998
		DK 629388 T	18-05-1998
		FI 942502 A	04-12-1994
		JP 7008516 A	13-01-1995
		NO 942058 A	05-12-1994
		NZ 260648 A	29-01-1997